Whirlpool® RF301OXT

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.3 cu. ft. Oven
- Three 6" and One 8" Coil Elements
- Chrome Drip Bowls
- Full-Width Storage Drawer

COLORS

White
with Black
Console(W)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**RF301OXT**
Capacity (cu. ft.)	4.3
Controls	Knob
Cooktop	
6" Coil Element (1,250 Watts)	3
8" Coil Element (2,100 Watts)	1
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Oven	
Oven Light	Manual
2 Adjustable Racks	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	160
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 8.9 Kw 6.7 Kw

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product and Cut-Out Dimensions

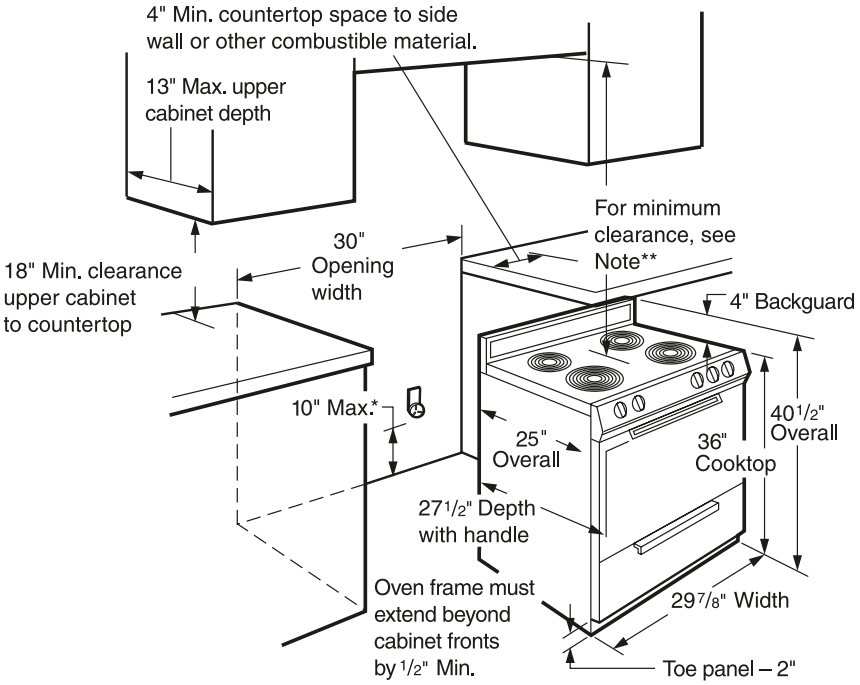
4" Min. countertop space to side wall or other combustible material.
13" Max. upper cabinet depth
For minimum clearance, see Note**
30" Opening width
18" Min. clearance upper cabinet to countertop
4" Backguard
10" Max.*
25" Overall
36" Cooktop
40 1/2" Overall
27 1/2" Depth with handle
Oven frame must extend beyond cabinet fronts by 1/2" Min.
29 7/8" Width
Toe panel – 2"

Do not pinch the power supply cord between the range and the wall.

**Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

***NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.